

FIG. 1

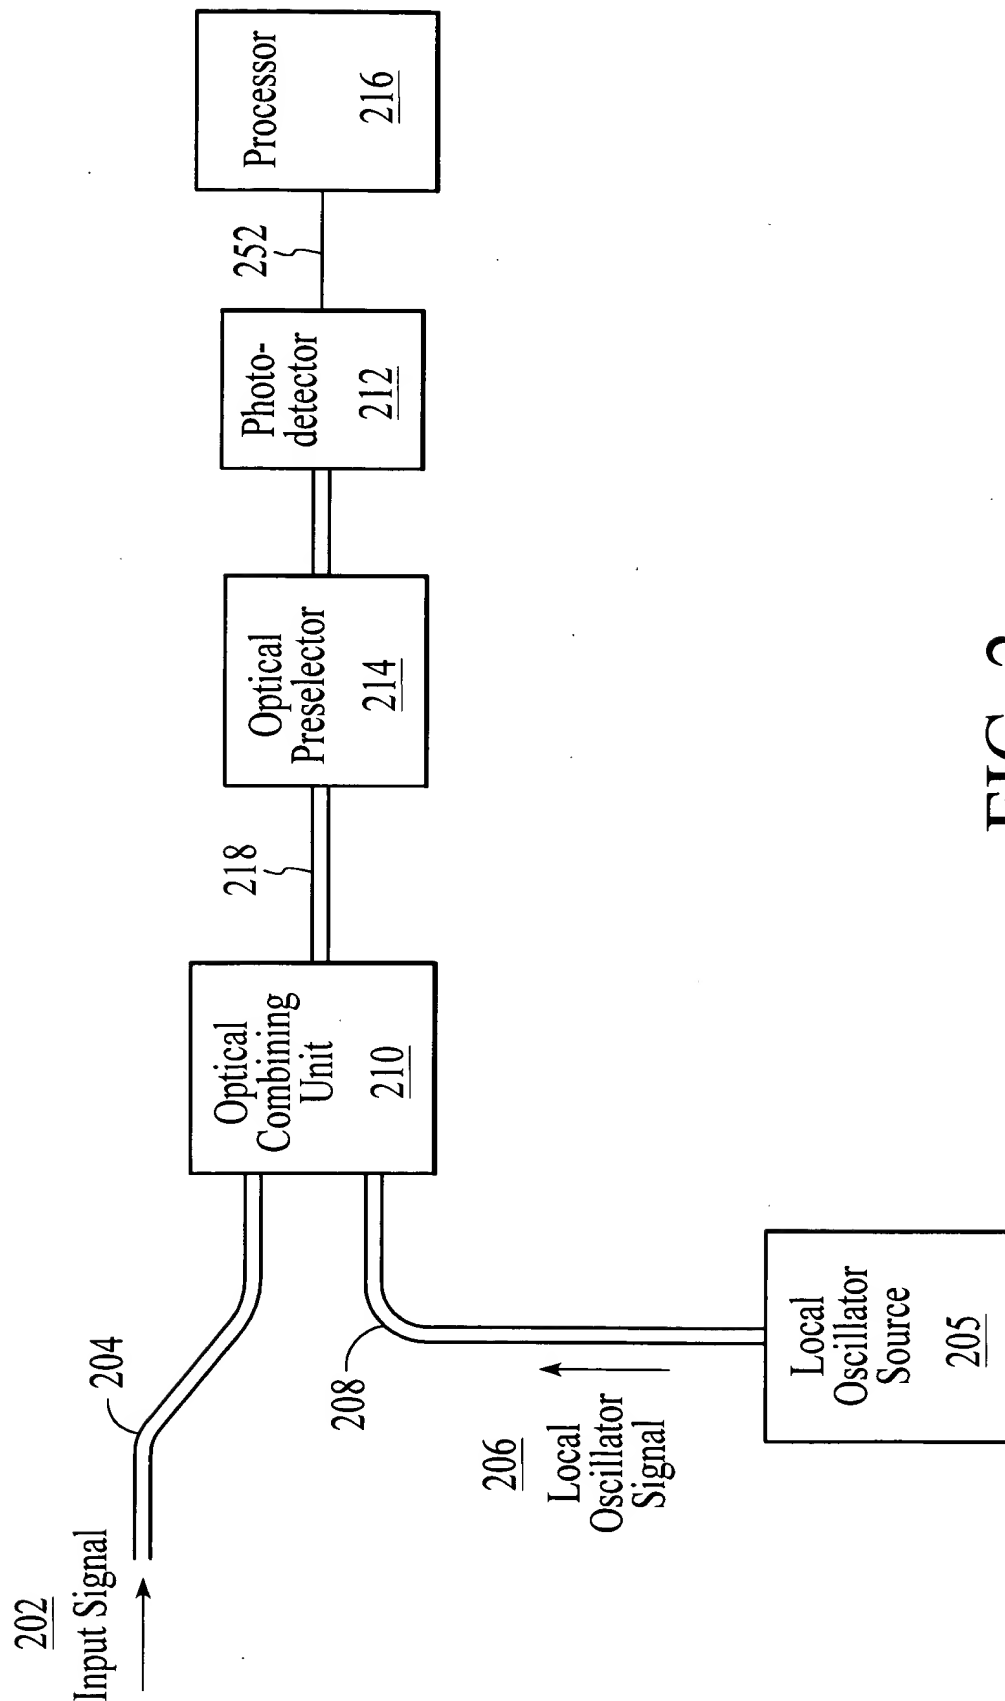


FIG. 2

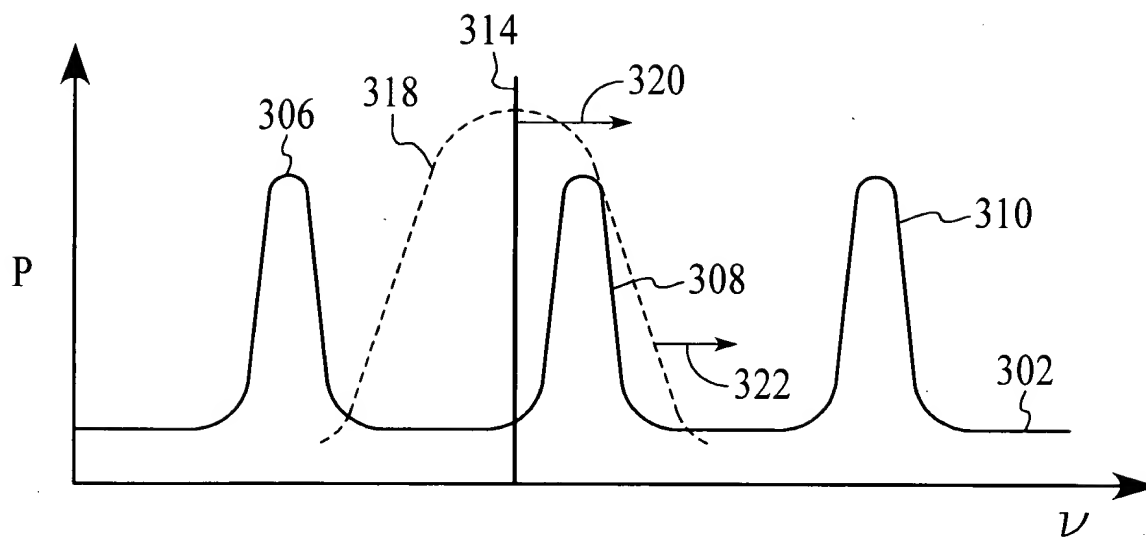


FIG. 3

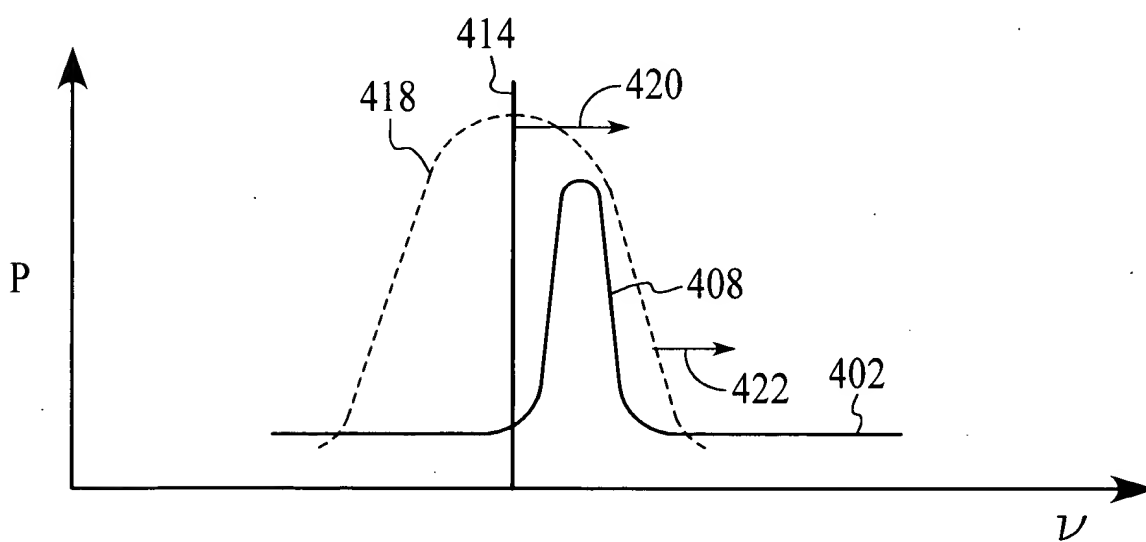


FIG. 4

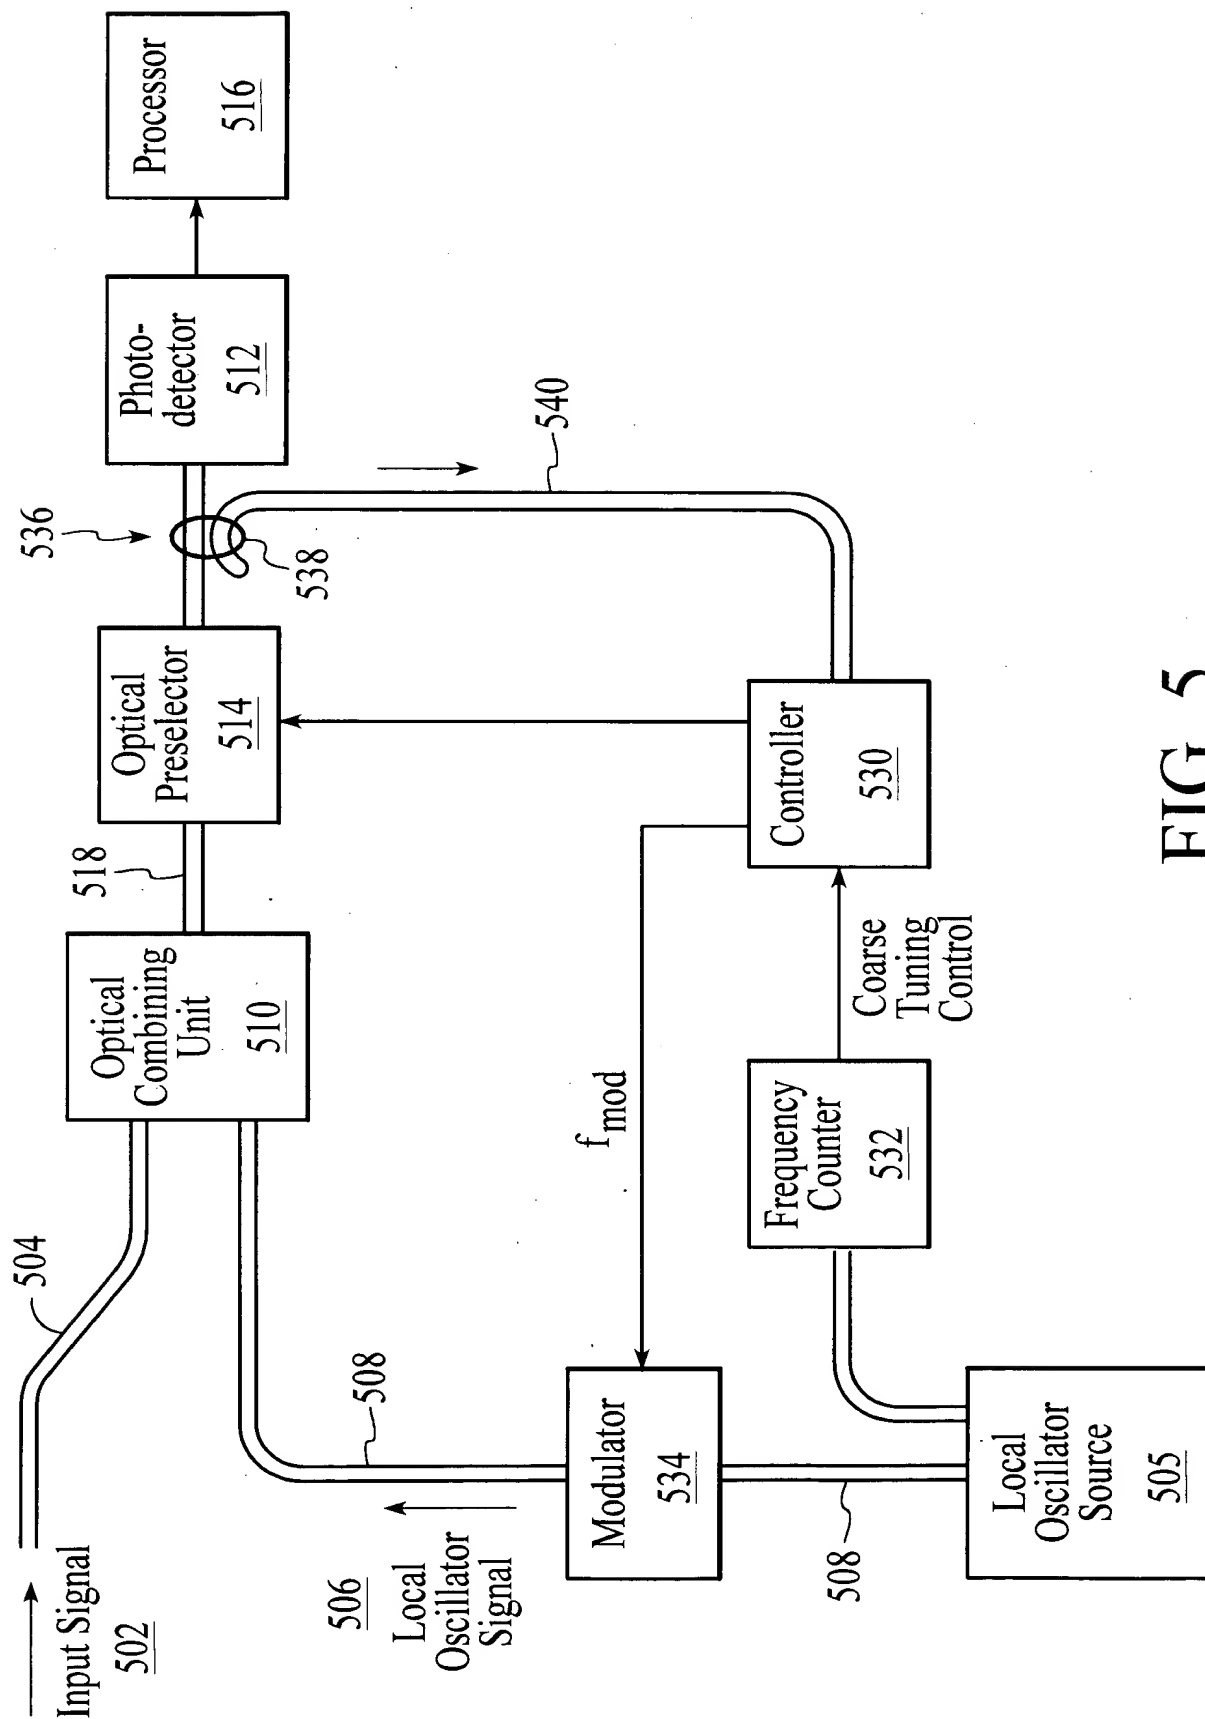


FIG. 5

FIG. 6

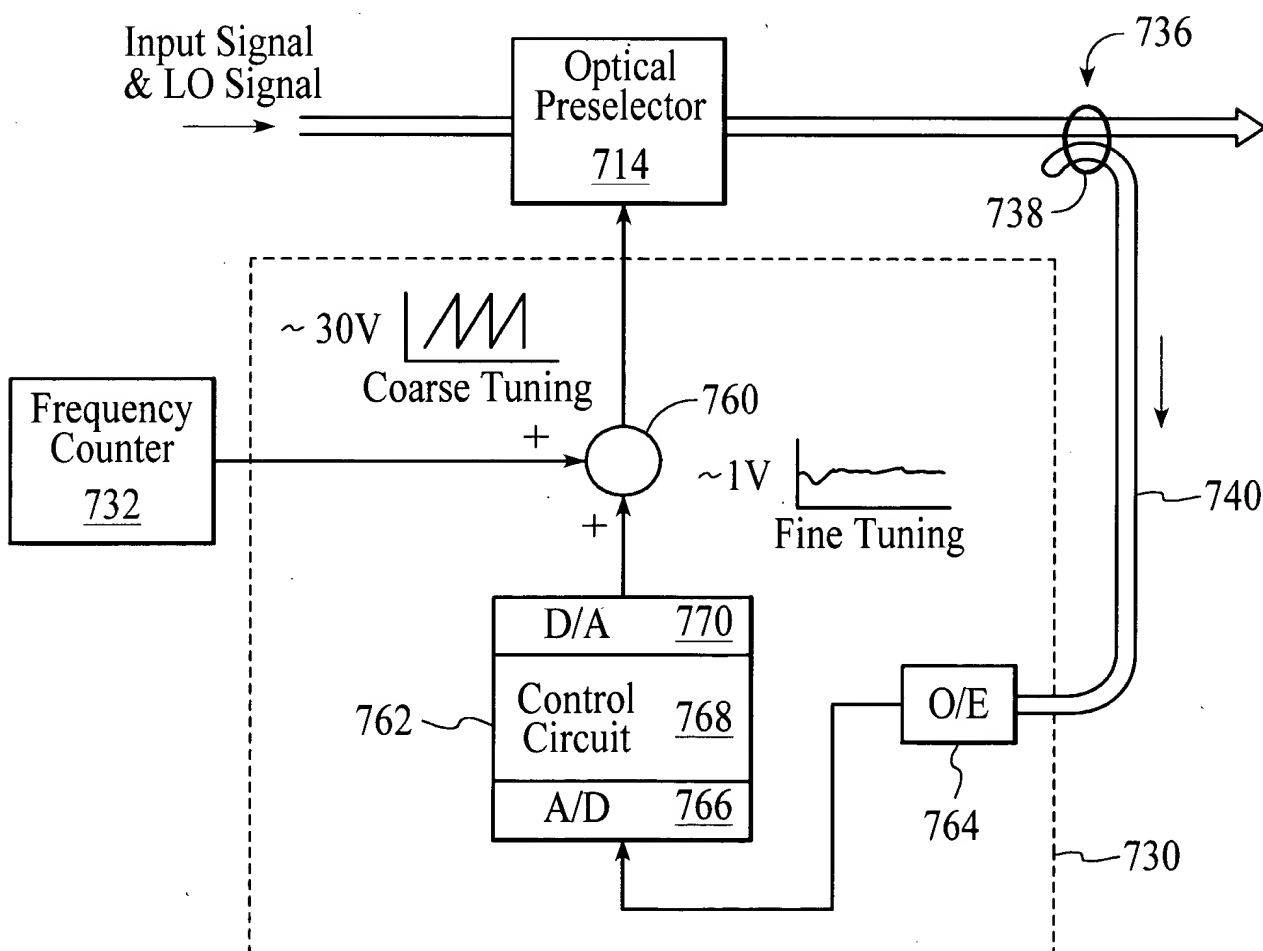
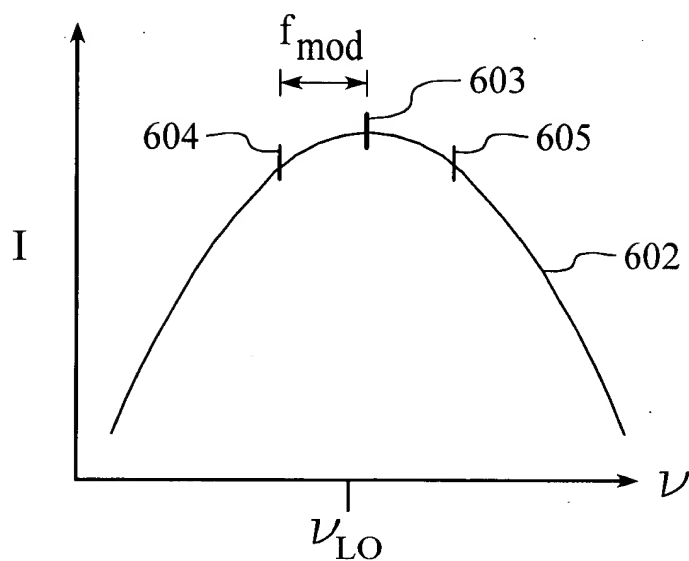


FIG. 7

FIG. 8

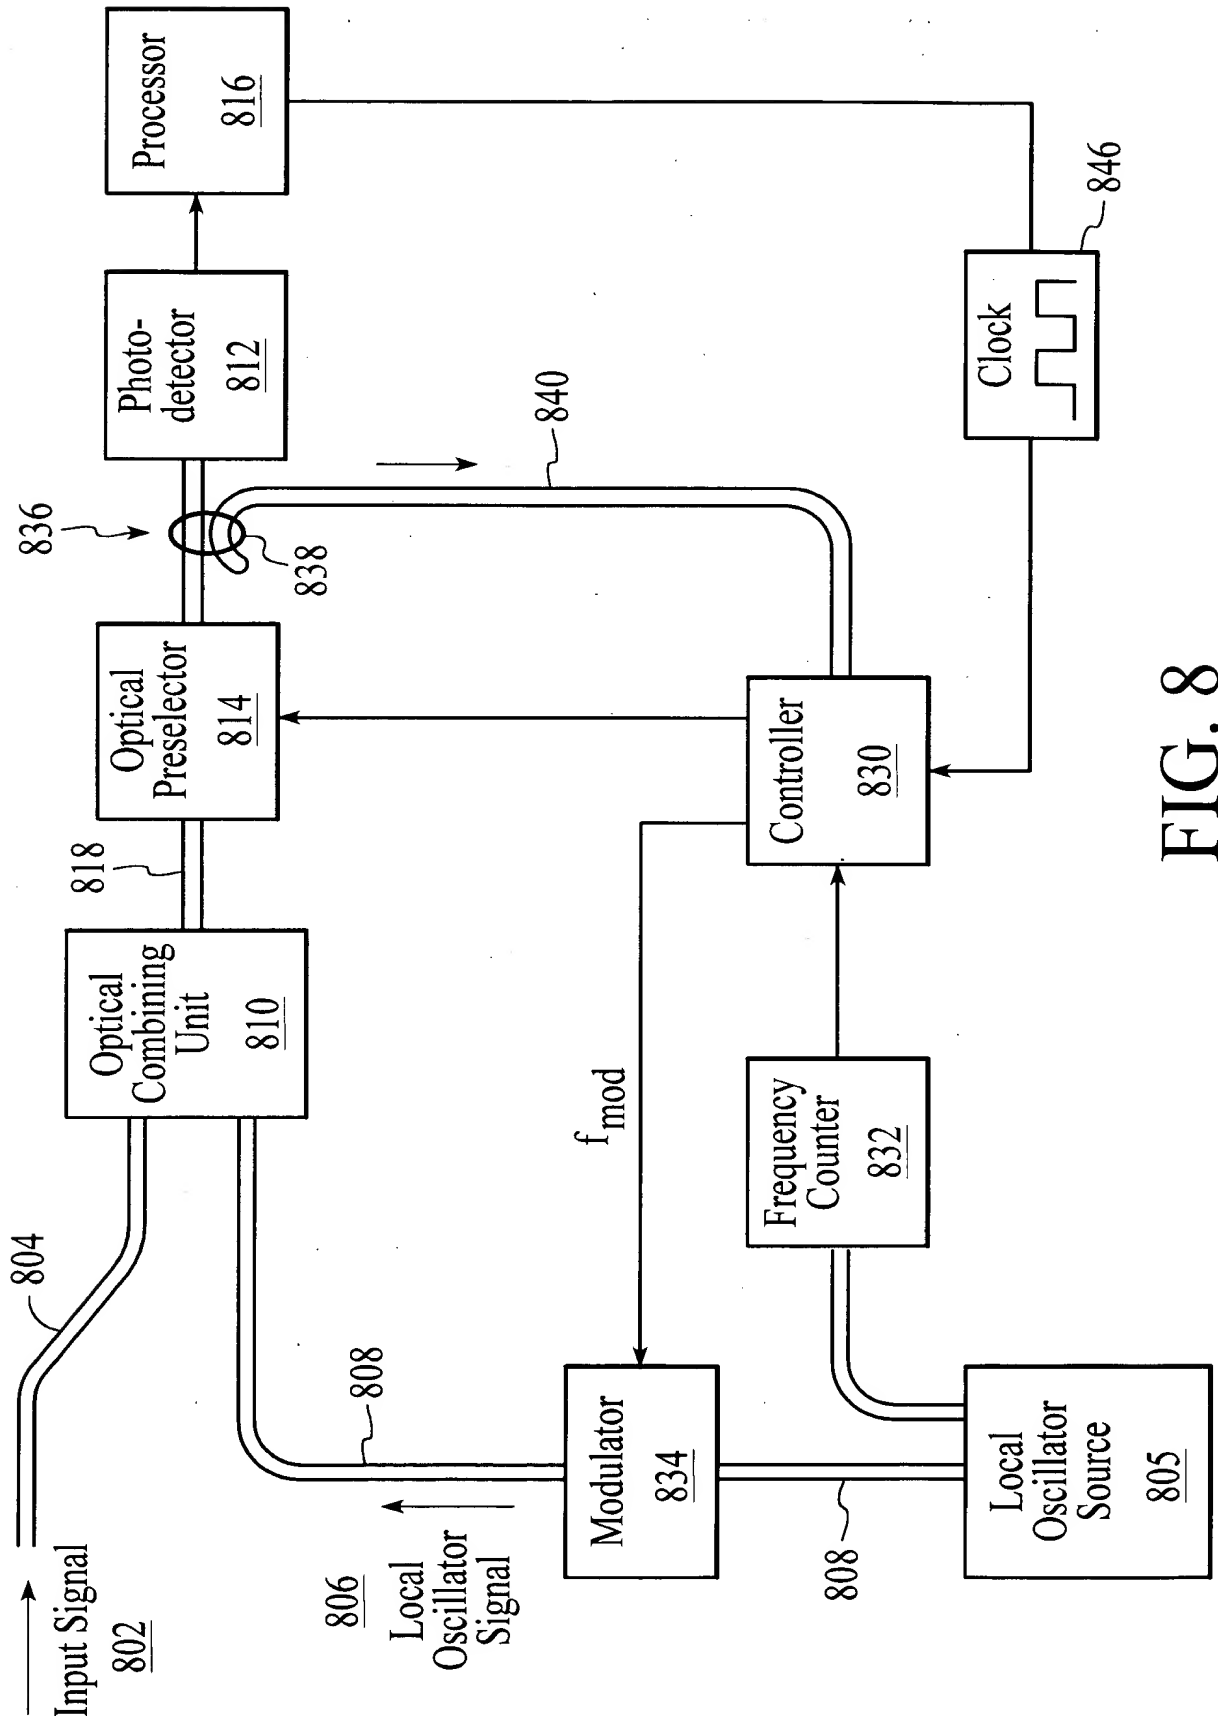


FIG. 8

2003007 2610350

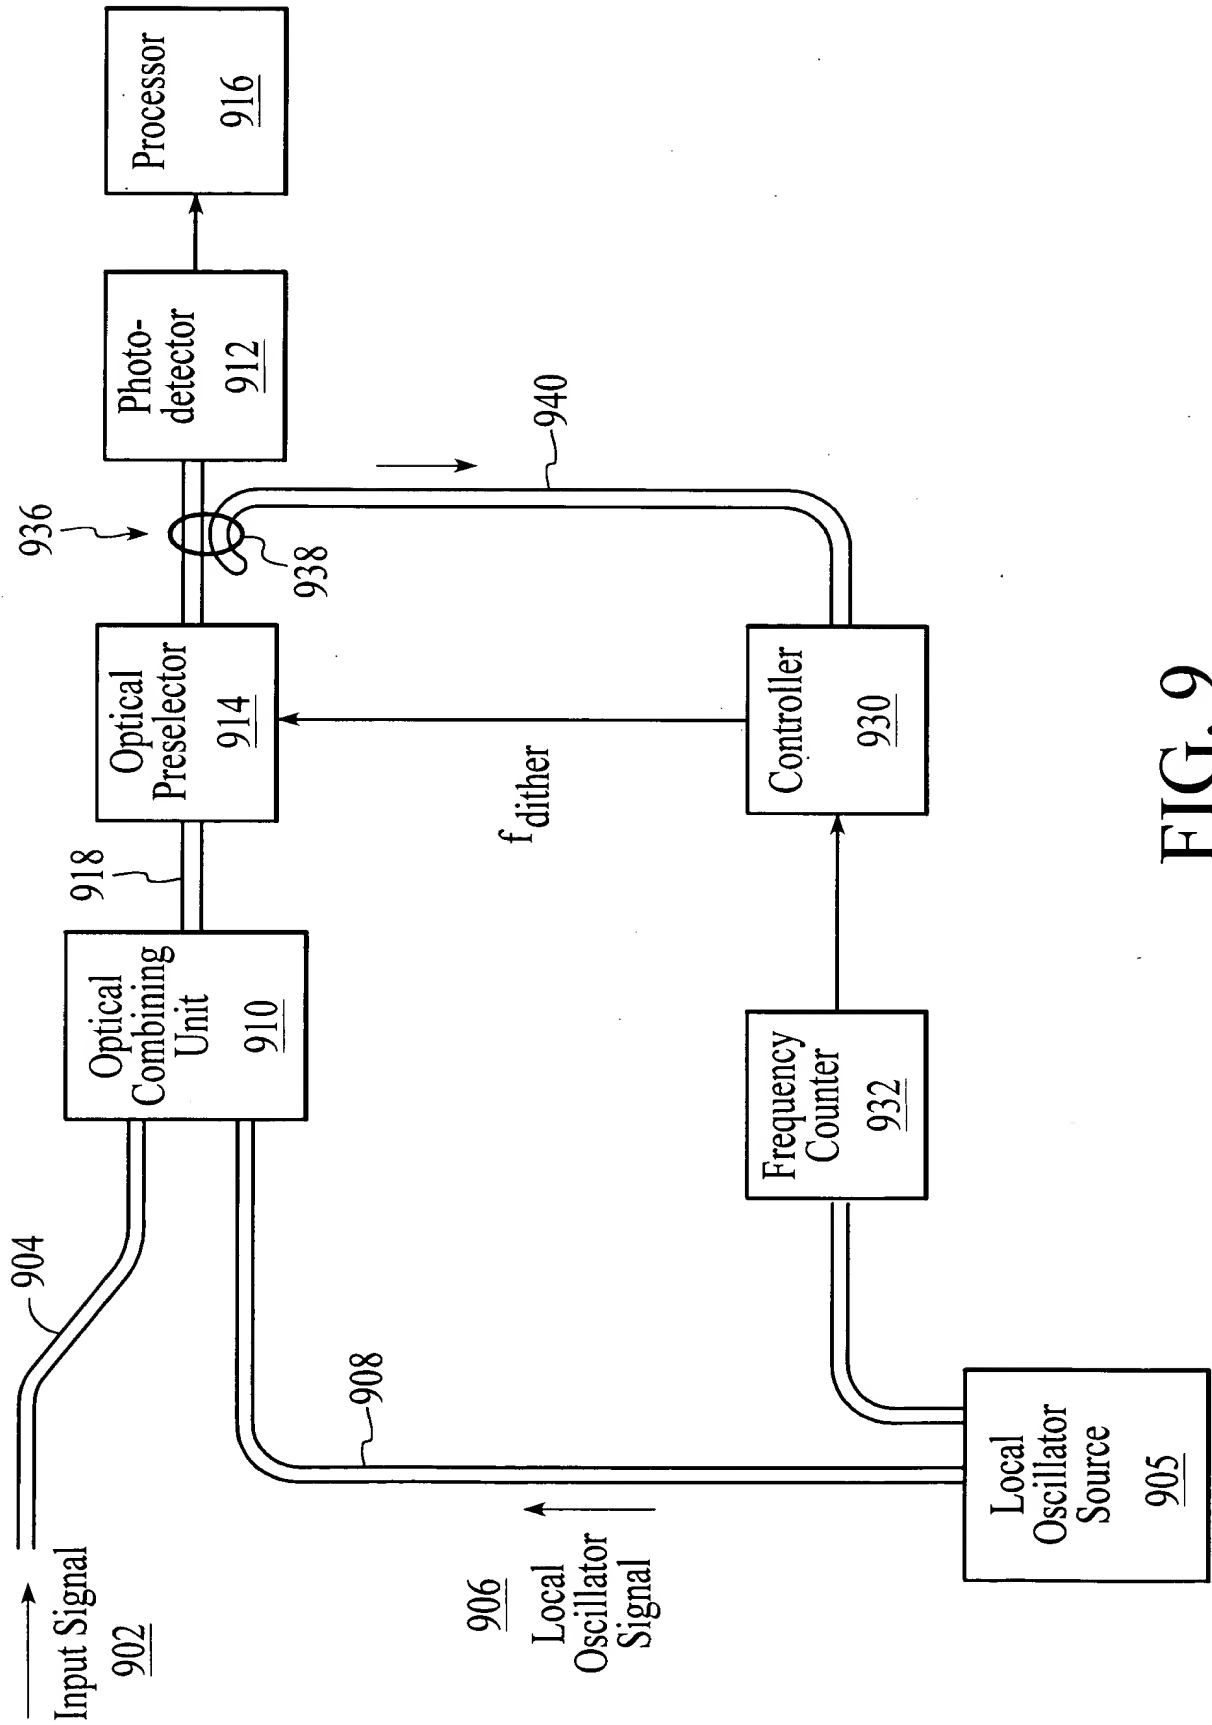


FIG. 9

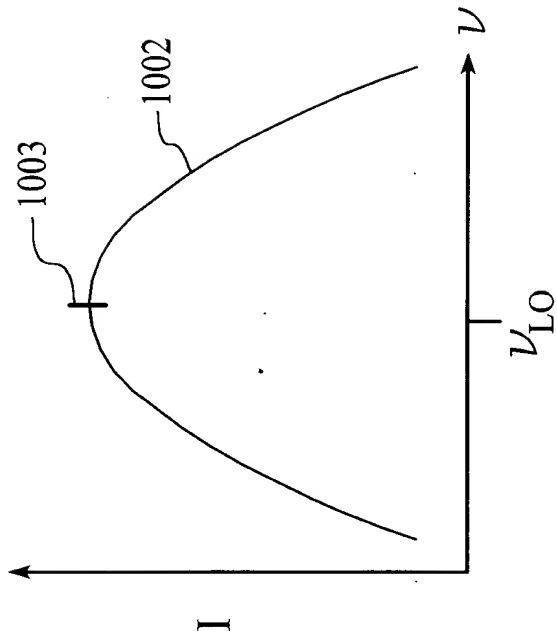


FIG. 10

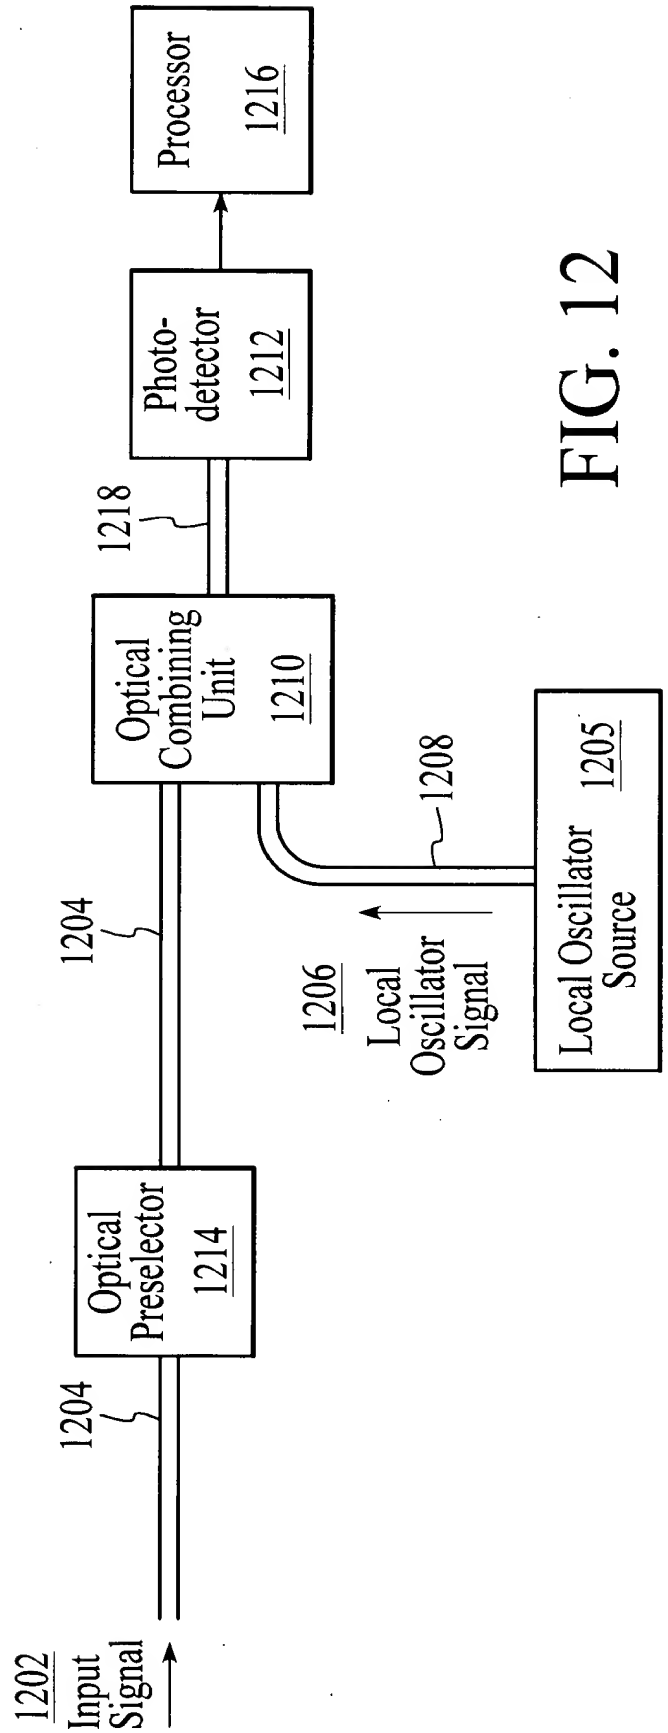


FIG. 12

20250714 16:30:00

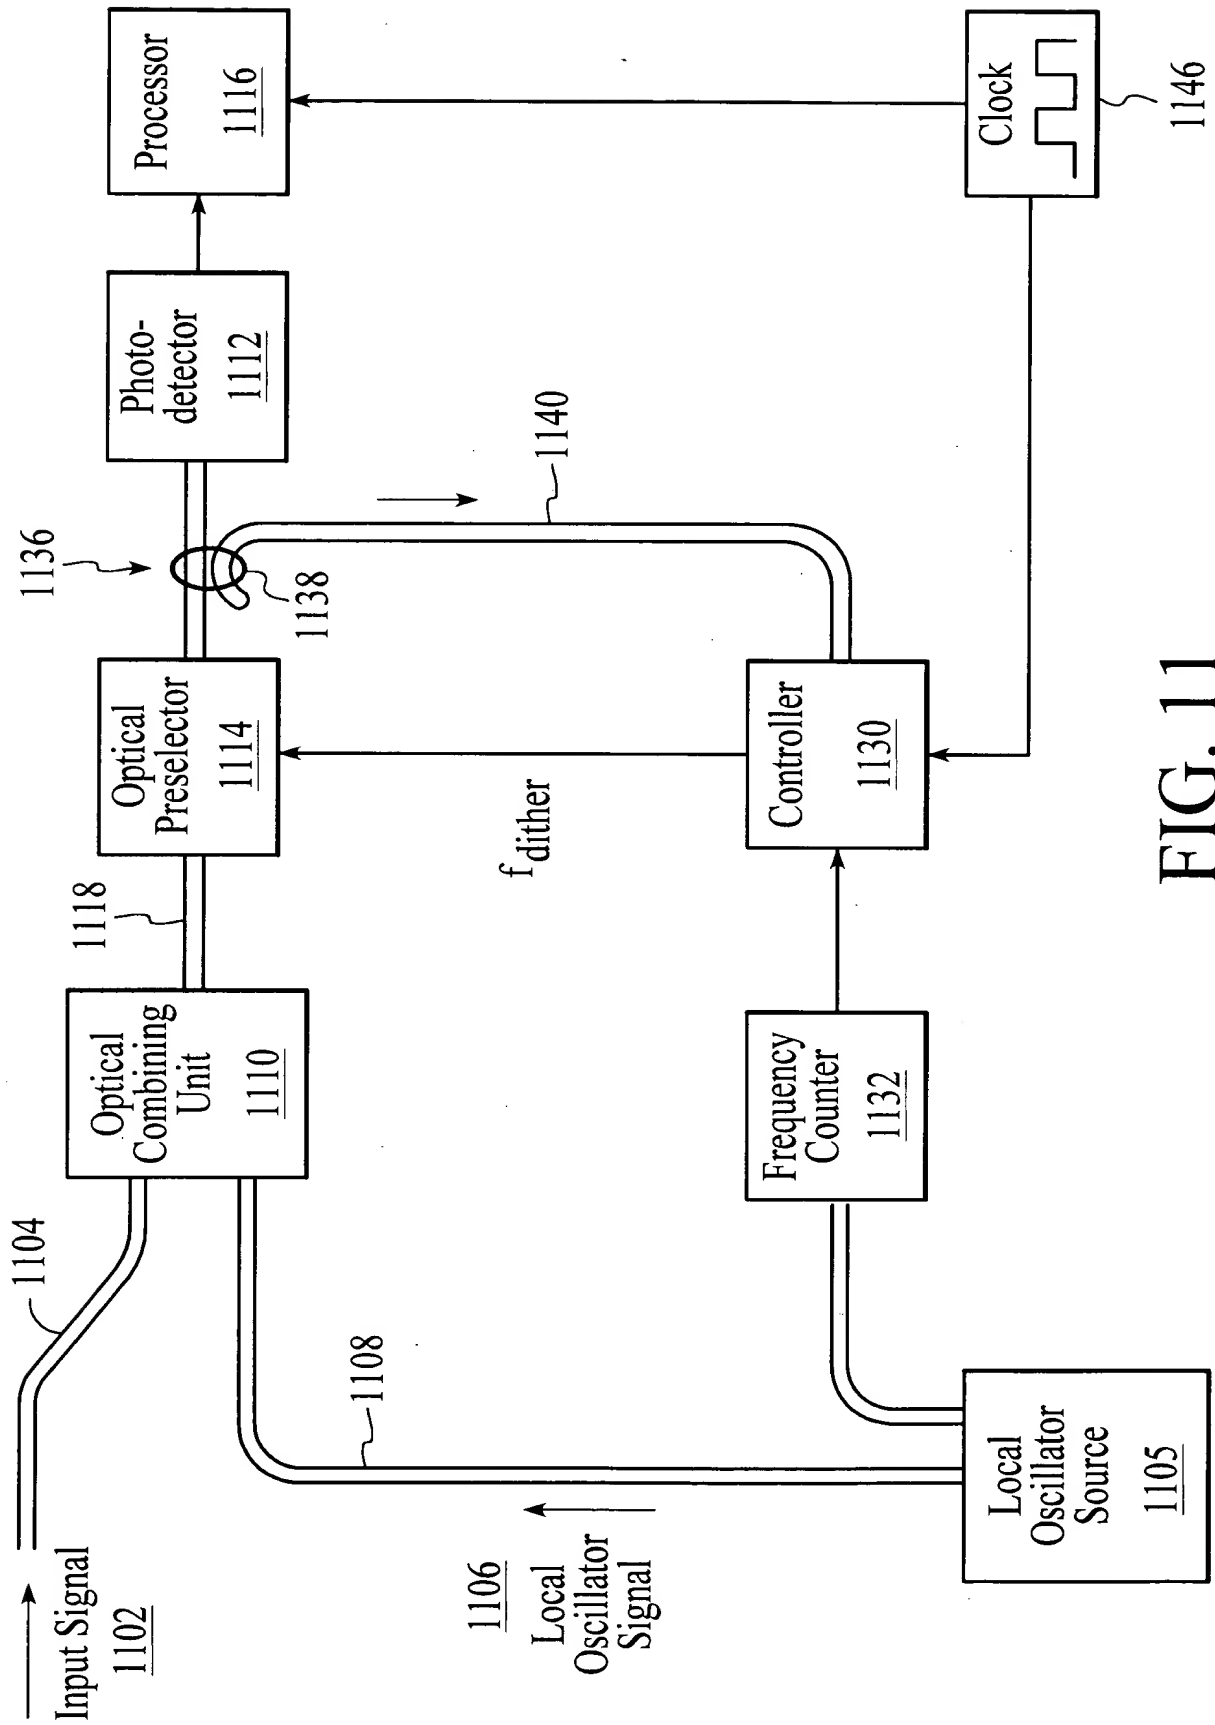


FIG. 11

FIG. 14

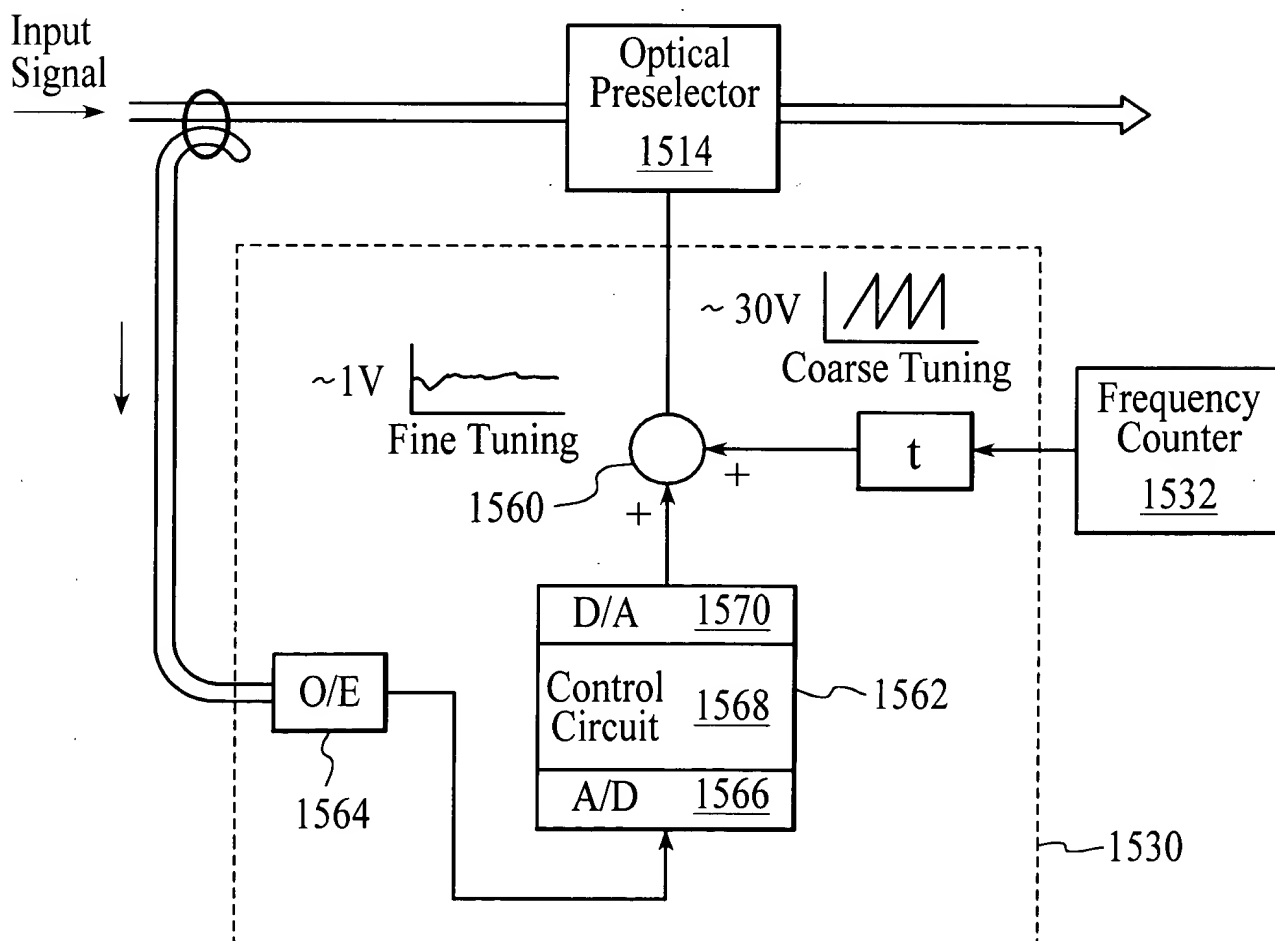
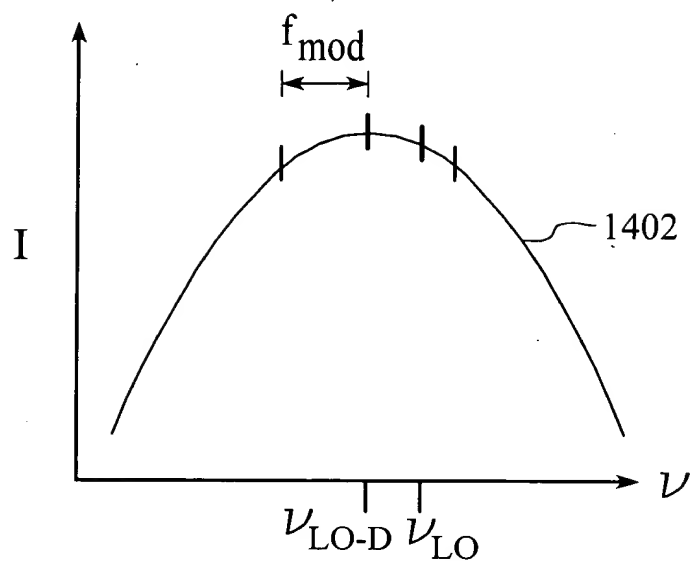


FIG. 15

FIG. 16

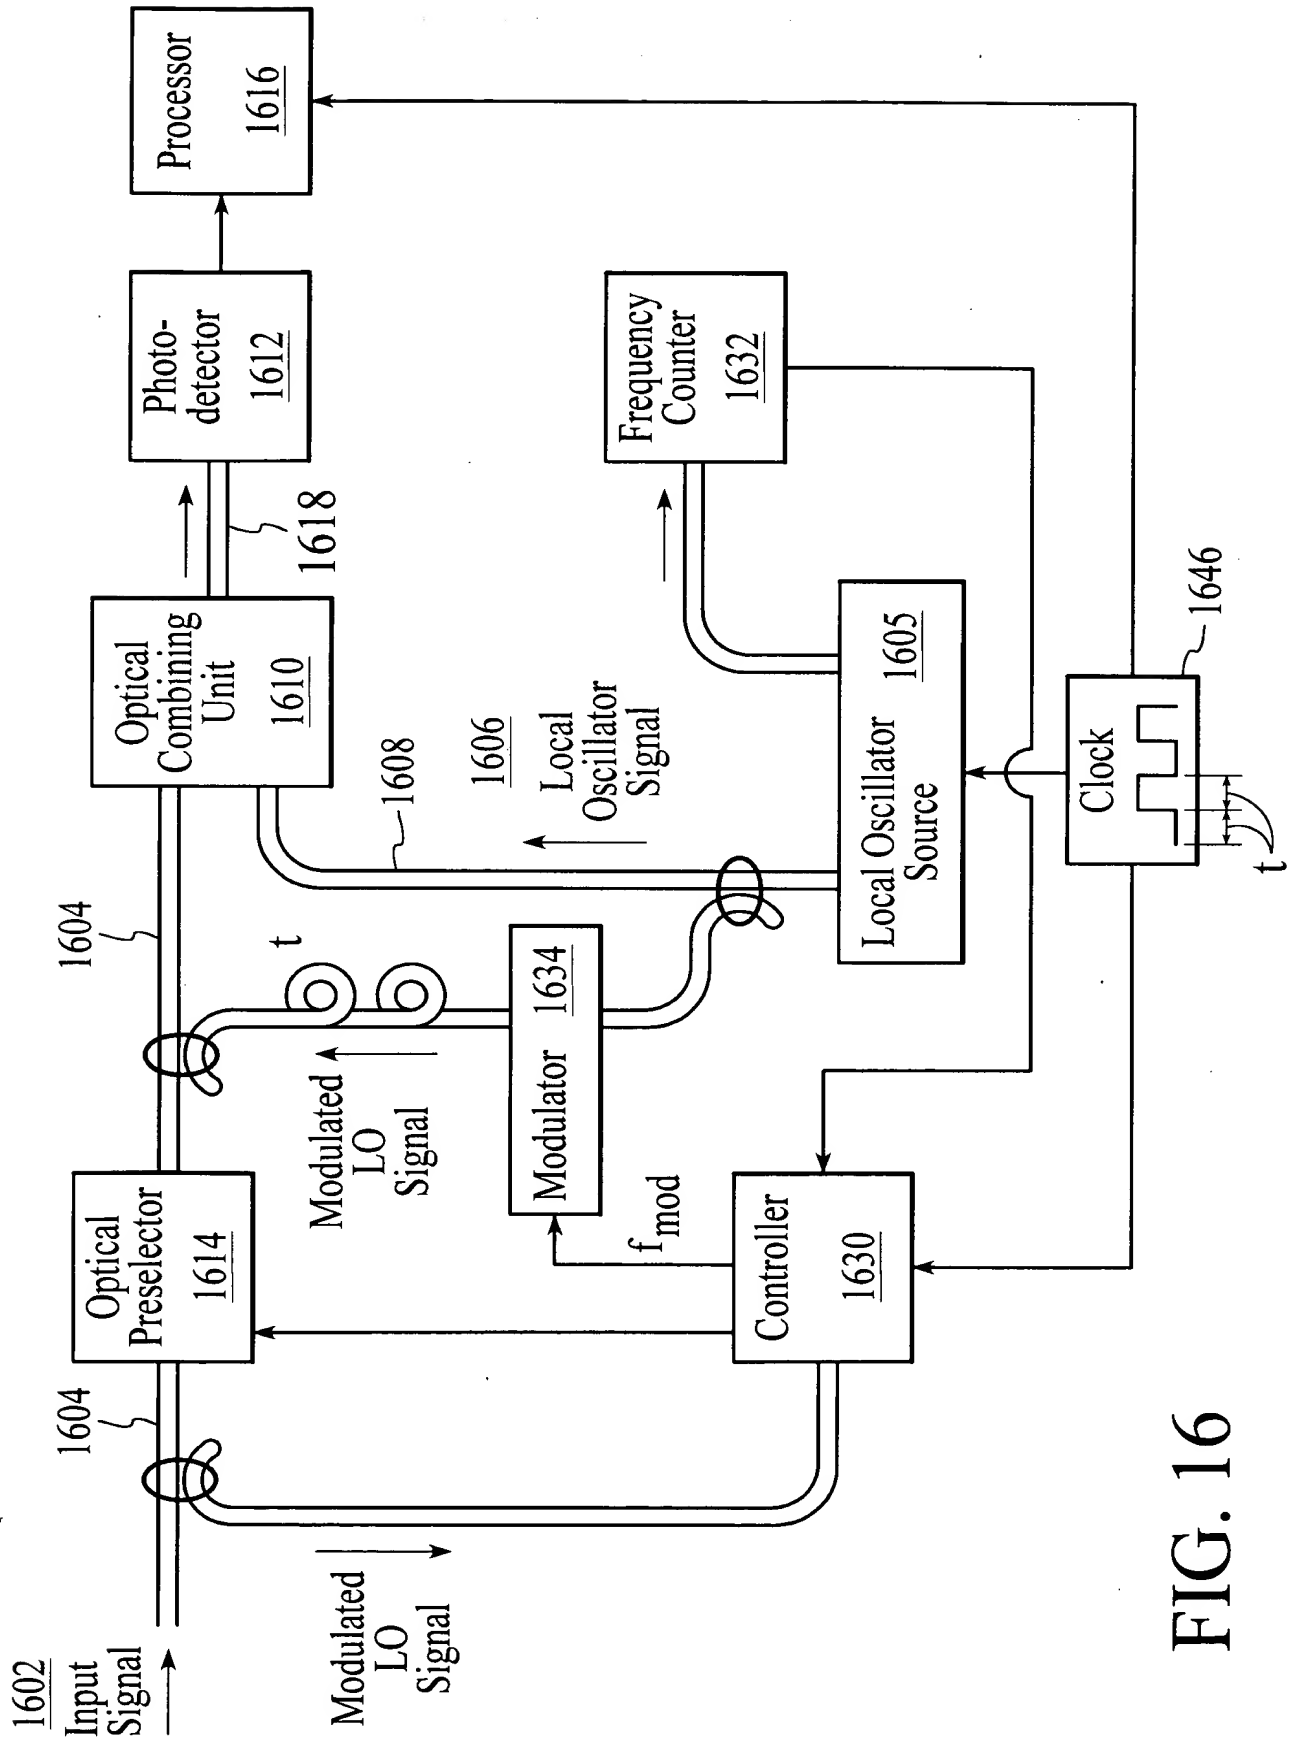


FIG. 16

2025001757-1

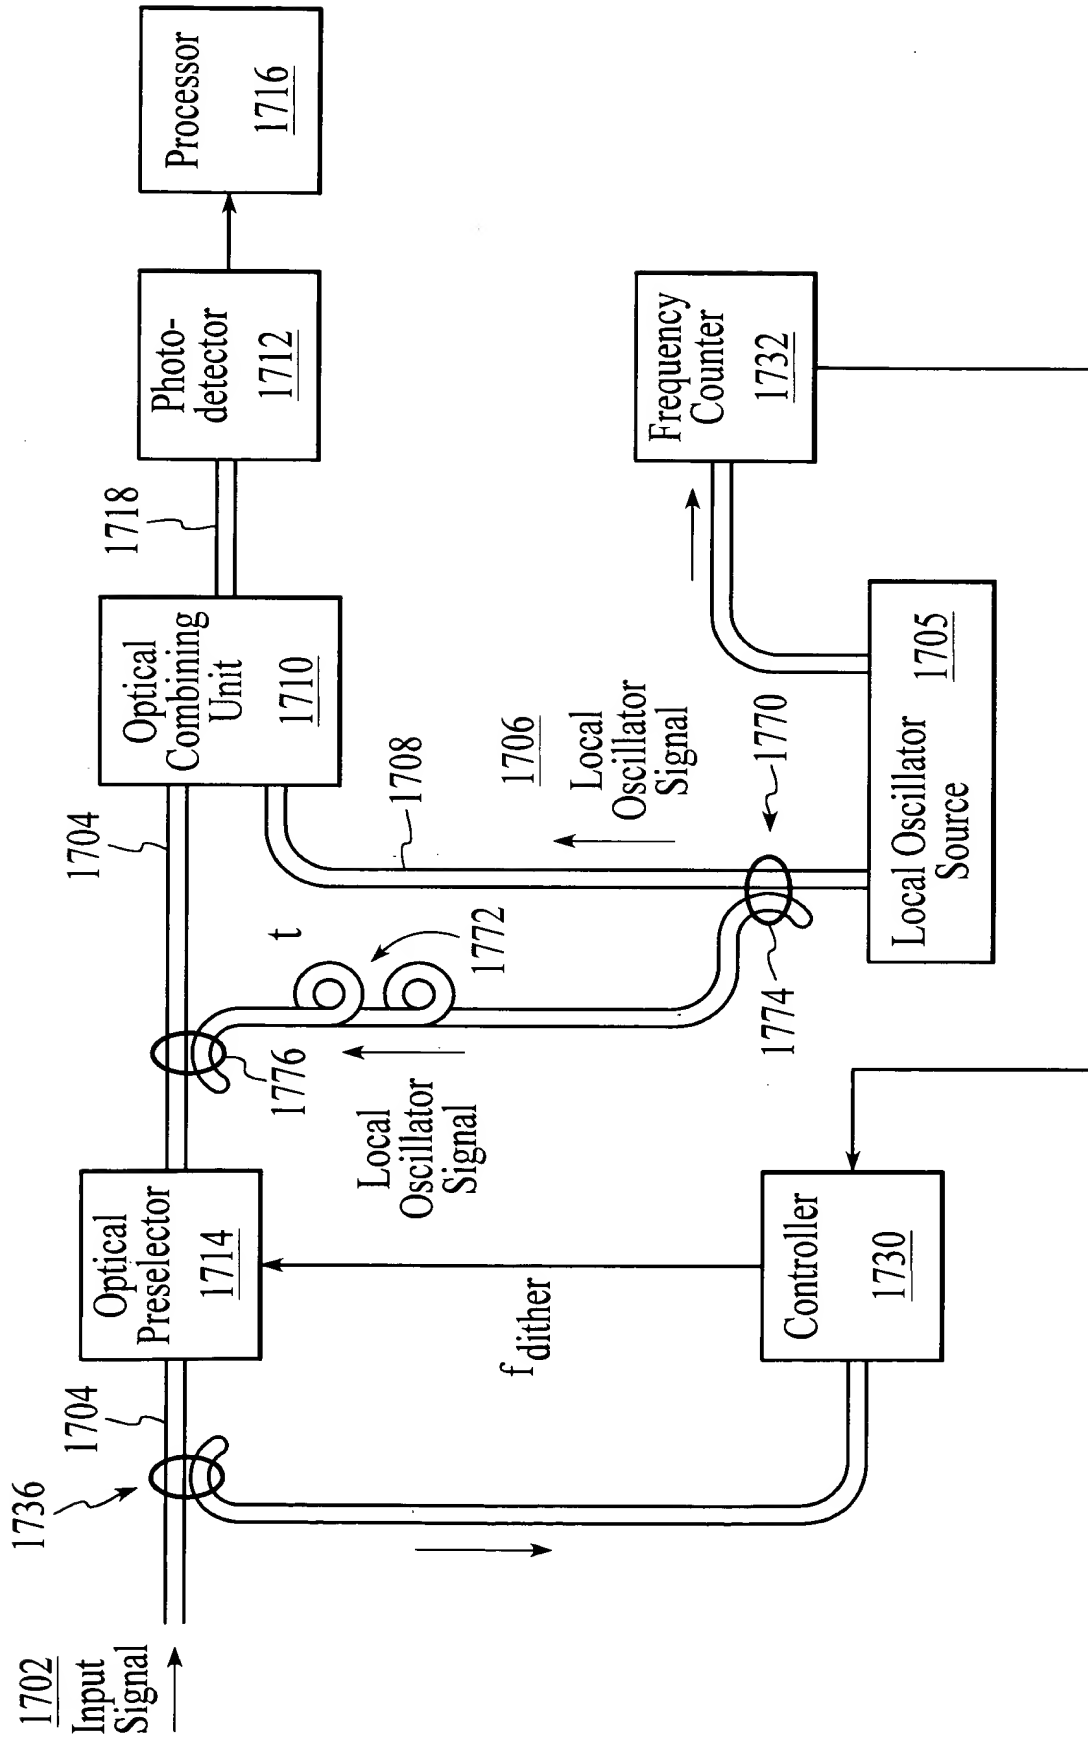


FIG. 17

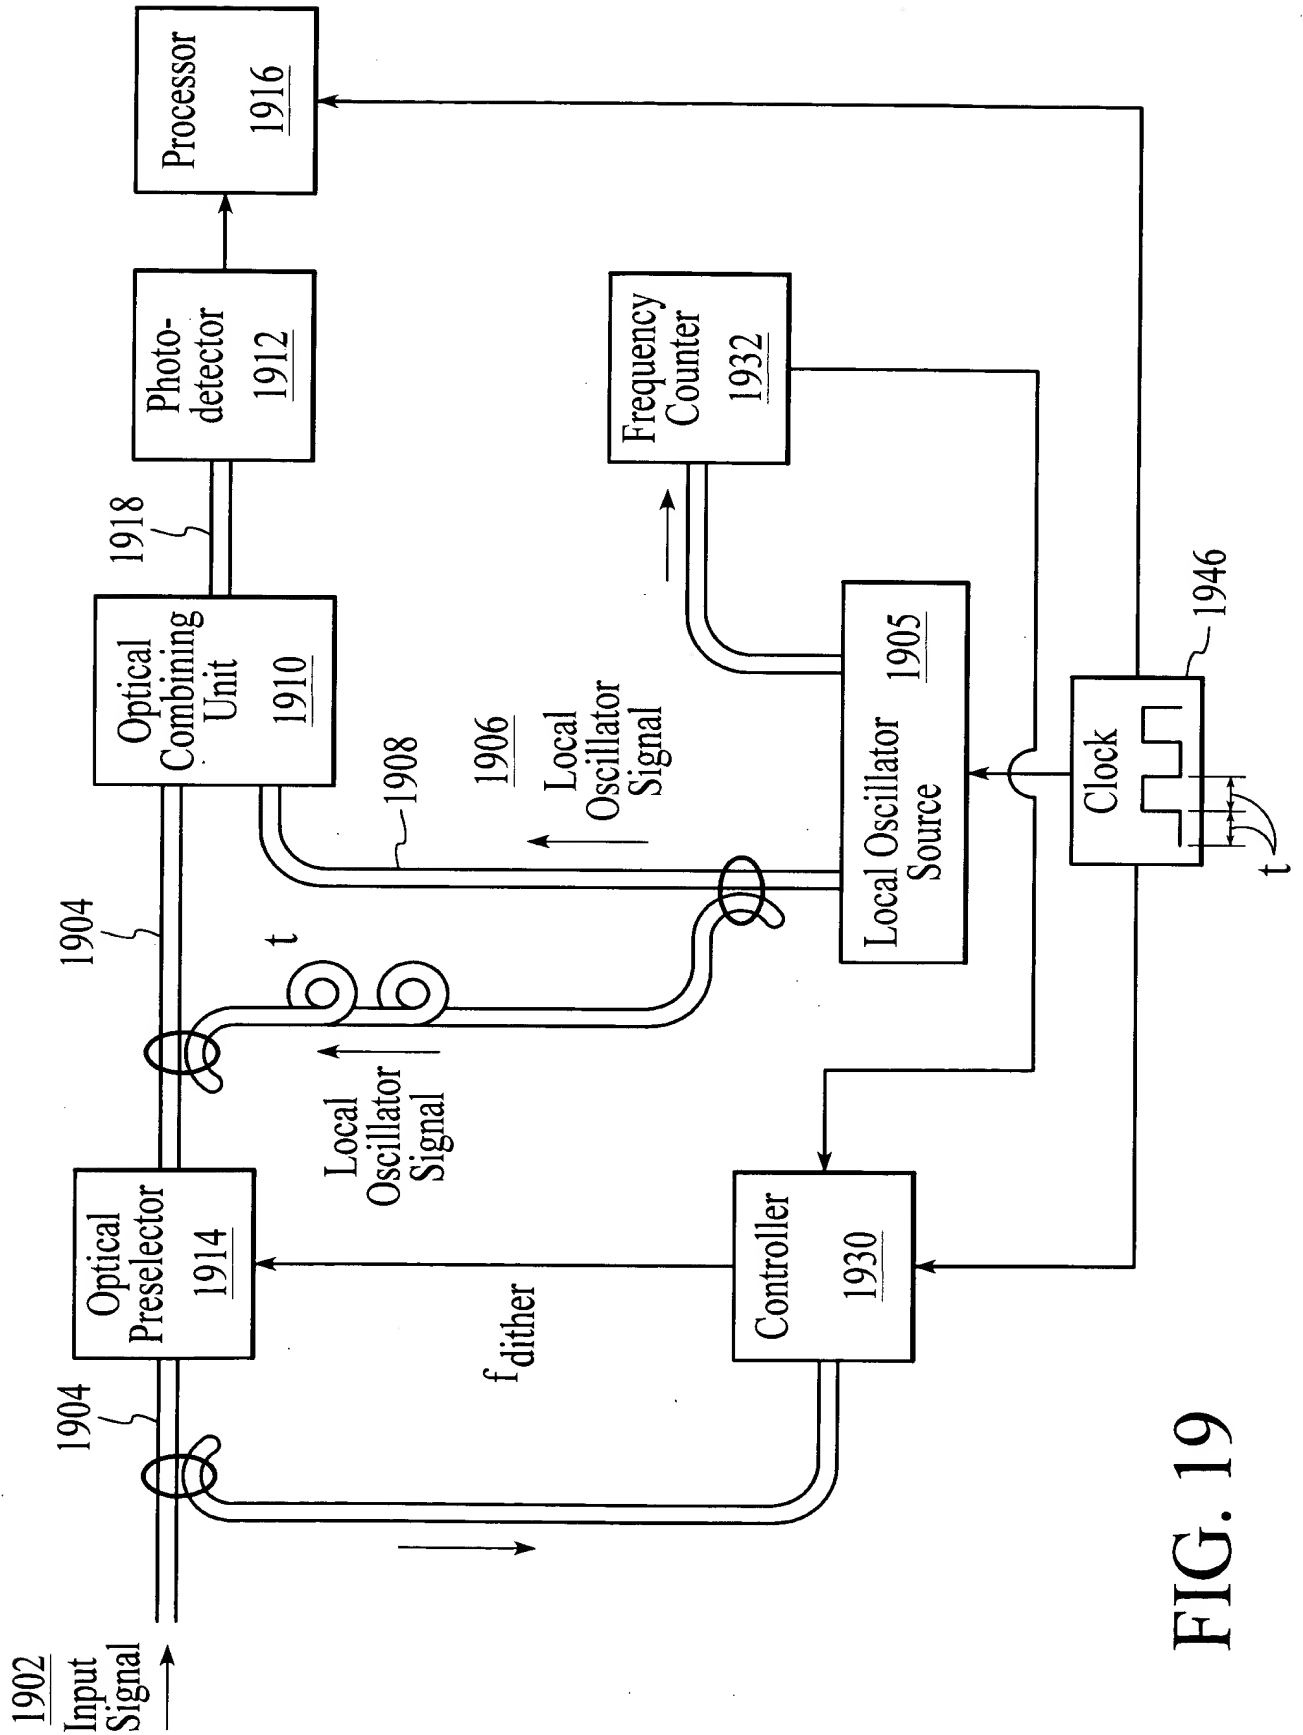


FIG. 19

000001757-1 14/16


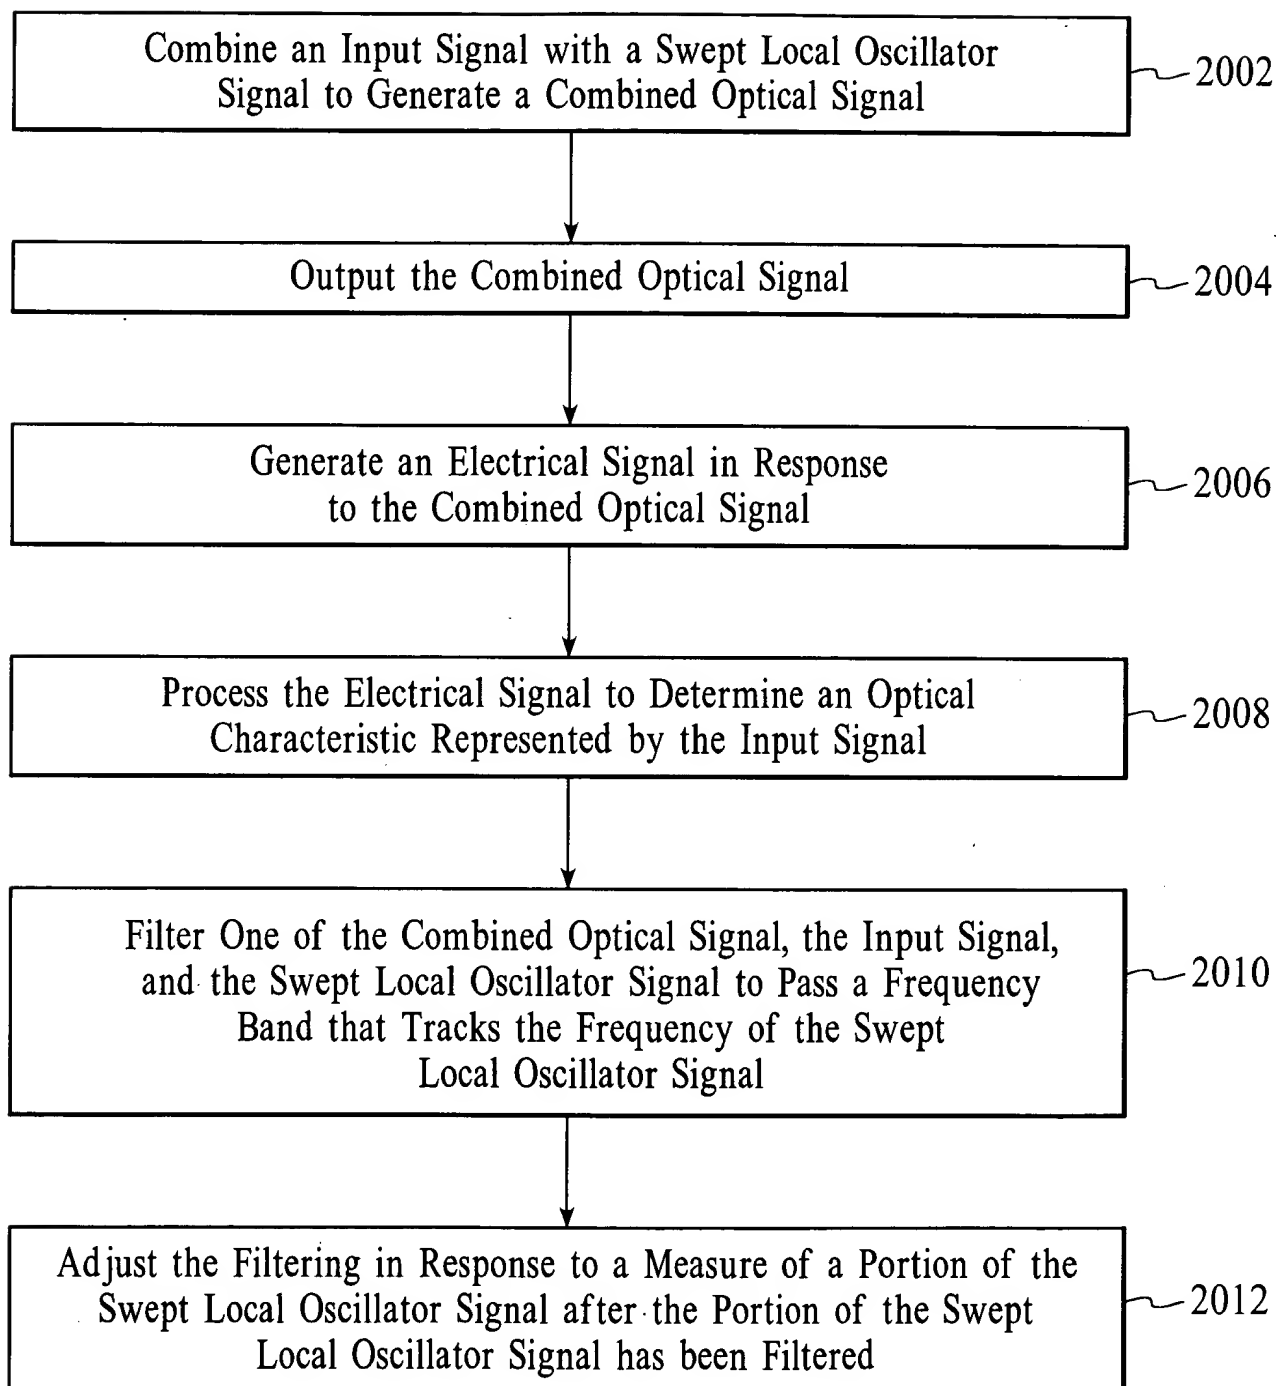


FIG. 20

FIG. 18

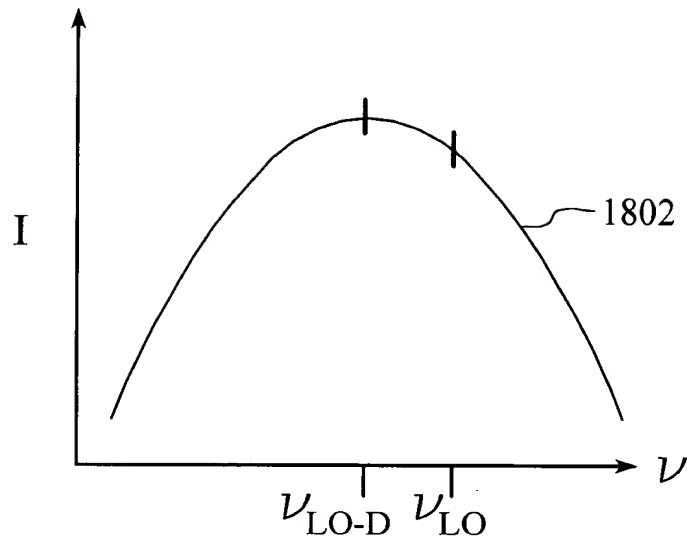

Modulate at Least Some Portion of the Swept Local
Oscillator Signal

2014

FIG. 20A

Dither a Filter Passband for One of the Combined Optical Signal,
the Input Signal, and the Swept Local Oscillator Signal

2016

FIG. 20B